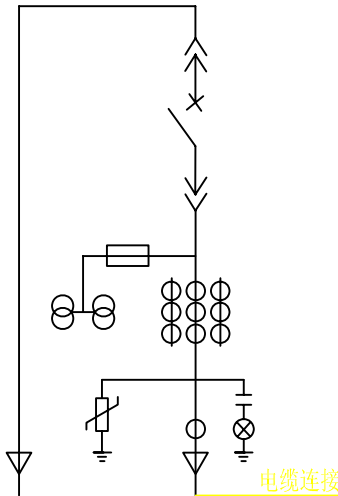
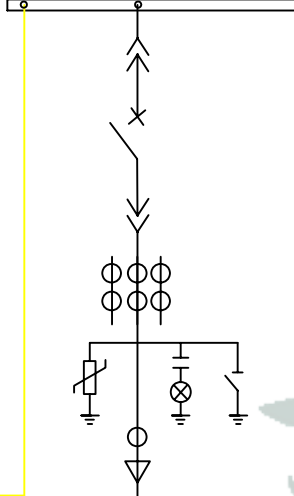
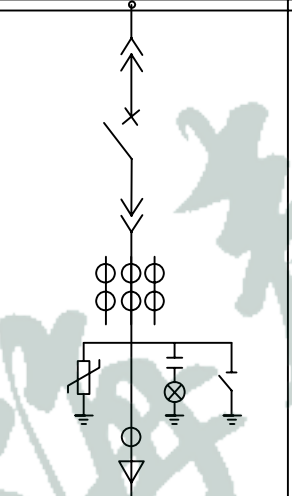
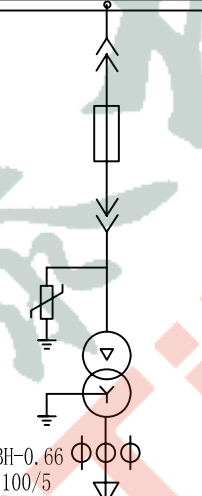
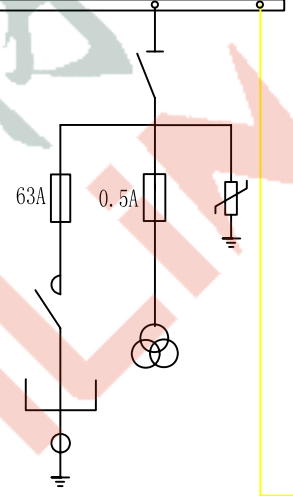
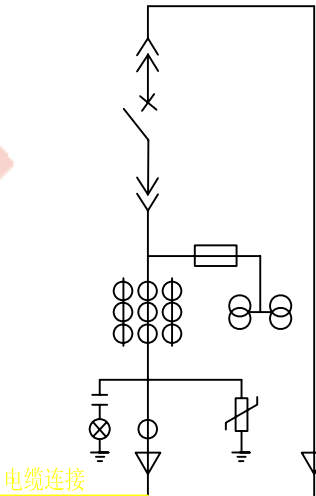


10kV 一 次 接 线 图						
	<p>Ⓟ PA RM194I-9X4 100/5A DC220V Ⓟ PV RM194U-9X4 10/0.1KV DC220V</p>	<p>Ⓟ PM RM194E-9S4 10/0.1KV 75/5A DC220V</p>	<p>Ⓟ PM RM194E-9S4 10/0.1KV 10/5A DC220V</p>	<p>Ⓟ PM RM194E-9S4 380V 100/5 AC220V</p>	<p>Ⓟ PA RM194I-9X4 100/5A DC220V Ⓟ PV RM194U-9X4 10/0.1KV DC220V</p>	<p>Ⓟ PA RM194I-9X4 100/5A DC220V Ⓟ PV RM194U-9X4 10/0.1KV DC220V</p>
开关柜编号	2AH	AH3	AH2	AH1	AHO	1AH
开关柜名称	2#进线+计量	2#馈线柜	1#馈线柜	所用变柜	电压互感器及消弧消谐柜	1#进线+计量
开关柜型号	KYN28A-12/054	KYN28A-12/006	KYN28A-12/006	KYN28A-12/057	SHK-XHG-B-10/50A	KYN28A-12/054
开关柜尺寸 (高x宽x深)	2300X800X1500	2300X800X1500	2300X800X1500	2300X800X1500	2300X1000X1500	2300X800X1500
隔离开关					GN19-10C/400	1
高压开关型号	RMW1-2000/630 220VDC电力操作机构	1 RMW1-2000/630 220VDC电力操作机构	1 RMW1-2000/630 220VDC电力操作机构	1 RMW1-2000/630 220VDC电力操作机构	1 RMW1-2000/630 220VDC电力操作机构	1 RMW1-2000/630 220VDC电力操作机构
熔断器	XRNP-10/1A	3		XRNP-10/5A	3 XRNP-10/0.5A	3 XRNP-10/1A
电流互感器	LZZBJ9-10 100/5A 0.2S/0.5/10P10	3 LZZBJ9-10 75/5A 0.5/10P10	3 LZZBJ9-10 10/5A 0.5/10P10	3	1 LMZJ1-0.5 100/5A	1 LZZBJ9-10 100/5A 0.2S/0.5/10P10
电压互感器	JDZ10-10 10/0.1KV 0.2级 25VA	2		SC9-10/50KVA 10/0.4 Dyn, 11	1 JDZJKX-10R 30/50VA 10/√3 /0.1/√3/ 0.1/3 0.5/6P	3 JDZ10-10 10/0.1KV 0.2级 25VA
过电压保护器	TBP-B-12.7/131	1 TBP-B-12.7/131	1 TBP-B-12.7/131	1 TBP-B-12.7/131	1 TBP-B-12.7F/131	1 TBP-B-12.7/131
接地开关		JN15-12/31.5	1 JN15-12/31.5	1		
带电显示器	DXN-10/Q	1 DXN-10/T	1 DXN-10/T	1		1 DXN-10/Q
零序电流互感器	LXK-Ø80	1 LXK-Ø80	1 LXK-Ø80	1		1 LXK-Ø80
微机保护装置	YH-B320	1 YH-B383	1 YH-B320	1	YH-B391	1 YH-B320
微型直流操作电源	HMP400/220 (含12Ah电池)	1 HMP400/220 (含12Ah电池)	1 HMP400/220 (含12Ah电池)	1	HMP400/220 (含12Ah电池)	1 HMP400/220 (含12Ah电池)
电缆型号及规格	YJV ₂₂ -8.7/10KV-3X70-SC80	YJV ₂₂ -8.7/10KV-3X50-SC80	YJV ₂₂ -8.7/10KV-3X25-SC80			YJV ₂₂ -8.7/10KV-3X70-SC80